



(12) **United States Patent**
Khubani et al.

(10) **Patent No.:** **US 10,065,754 B2**
(45) **Date of Patent:** **Sep. 4, 2018**

- (54) **CONTAINER SEALING DEVICE**
- (71) Applicant: **Telebrands Corp.**, Fairfield, NJ (US)
- (72) Inventors: **Ajit Khubani**, Saddle River, NJ (US);
Paul Dowd, Scarsdale, NY (US); **Ryan Kelly**, Yorktown Heights, NY (US)
- (73) Assignee: **Telebrands Corp.**, Fairfield, NJ (US)
- (*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 0 days.

- (21) Appl. No.: **15/722,930**
- (22) Filed: **Oct. 2, 2017**

(65) **Prior Publication Data**
US 2018/0022481 A1 Jan. 25, 2018

Related U.S. Application Data
(63) Continuation of application No. 15/407,985, filed on Jan. 17, 2017, now Pat. No. 9,776,744, which is a (Continued)

(51) **Int. Cl.**
B65B 1/04 (2006.01)
B65B 3/17 (2006.01)
B65B 7/02 (2006.01)
(52) **U.S. Cl.**
CPC **B65B 3/17** (2013.01); **B65B 7/025** (2013.01)


(58) **Field of Classification Search**
CPC A61B 10/0045; A63H 27/10; A63H 2027/1033; A63H 2027/1041; (Continued)

- (56) **References Cited**
- U.S. PATENT DOCUMENTS
- 600,967 A 3/1898 Mead
- 723,292 A 3/1903 Metzger
(Continued)
- FOREIGN PATENT DOCUMENTS
- CN 201161115 12/2008
- CN 201710967 1/2011
(Continued)

OTHER PUBLICATIONS
Air Force 4 Inflator, available at www.conwinonline.com, published Jun. 9, 2013.
(Continued)
Primary Examiner — Jason K Niesz
(74) *Attorney, Agent, or Firm* — Cooper & Dunham, LLP

(57) **ABSTRACT**
An apparatus for filling a plurality of containers with a fluid. The apparatus including a connector configured to removably couple the apparatus to a fluid source, a flow path providing fluid communication between the fluid source and a plurality of containers coupled to the apparatus, a sealing element disposed within each of the plurality of containers, the sealing element configured to couple the container to the apparatus and automatically seal the container when the container is decoupled from the apparatus, a retaining member including a sleeve affixed to each of the plurality of containers, to position the sealing element in a neck of each of the plurality of containers, the sleeve being configured to prevent radial expansion of the containers, and, a mixing mechanism disposed in the flow path and configured to receive an additive and introduce the additive in to the flow path.

5 Claims, 9 Drawing Sheets

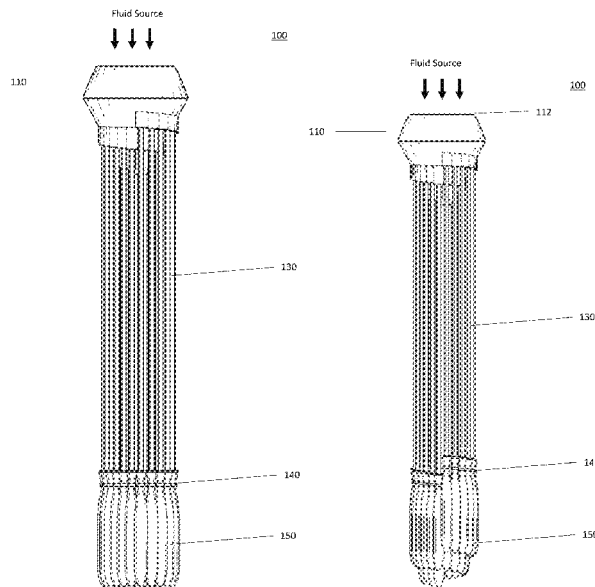

Related U.S. Application Data

continuation-in-part of application No. 15/359,134, filed on Nov. 22, 2016, now Pat. No. 9,783,327, which is a continuation-in-part of application No. 15/123,434, filed as application No. PCT/US2016/018912 on Feb. 22, 2016, which is a continuation of application No. 14/997,230, filed on Jan. 15, 2016, now abandoned, said application No. 15/359,134 is a continuation-in-part of application No. 15/123,453, filed as application No. PCT/US2016/018922 on Feb. 22, 2016, which is a continuation of application No. 14/978,839, filed on Dec. 22, 2015, now abandoned.

- (60) Provisional application No. 62/254,487, filed on Nov. 12, 2015, provisional application No. 62/182,122, filed on Jun. 19, 2015, provisional application No. 62/182,122, filed on Jun. 19, 2015.

- (58) **Field of Classification Search**
CPC A63H 2027/105; B65B 3/17; B65B 3/04; B65B 3/28; B65B 7/025
See application file for complete search history.

- (56) **References Cited**

U.S. PATENT DOCUMENTS

1,832,408	A	11/1931	Modes
2,797,132	A	6/1957	Max
3,580,303	A	5/1971	Roberge
3,948,259	A	4/1976	Bolduc
4,142,322	A	3/1979	Zeyra
4,243,220	A	1/1981	Shelley
4,327,734	A	5/1982	White
4,471,779	A	9/1984	Antoshkiw
4,529,018	A	7/1985	Lichfield
4,545,367	A	10/1985	Tucci
RE32,348	E	2/1987	Pevsner
4,794,498	A	12/1988	Neumeier
4,850,912	A	7/1989	Koyanagi
4,917,646	A	4/1990	Kieves
4,955,412	A	9/1990	Younts
5,004,633	A	4/1991	Lovik
5,014,757	A	5/1991	Donaldson
5,067,301	A	11/1991	Shore
5,165,393	A	11/1992	Kawaguchi
5,188,558	A	2/1993	Barton
5,295,892	A	3/1994	Felton
5,304,123	A	4/1994	Atala
5,439,199	A	8/1995	Briggs
5,496,203	A	3/1996	Murray
5,509,540	A	4/1996	Pomerantz
5,544,466	A	8/1996	Bonnet
D378,120	S	2/1997	Wood
5,711,691	A	1/1998	Damask
5,730,366	A	3/1998	DeWitt
5,755,419	A	5/1998	Gearhart
5,776,291	A	7/1998	Lang
5,826,803	A	10/1998	Cooper
6,007,403	A	12/1999	Urspringer
6,106,135	A	8/2000	Zingale
6,106,509	A	8/2000	Loubser
6,192,917	B1	2/2001	Loza
6,408,902	B1	6/2002	Liau
6,431,938	B1	8/2002	Carlton
6,478,057	B1	11/2002	Bearss
6,478,651	B1	11/2002	Weir
6,479,776	B2	11/2002	Nakase
6,488,557	B1	12/2002	Elliot
6,719,020	B1	4/2004	Bisotto
7,160,325	B2	1/2007	Morningstar
7,293,477	B2	11/2007	Furey
D619,202	S	7/2010	Zhang
7,981,470	B1	7/2011	Butler
8,037,906	B1	10/2011	Grillo

8,349,417	B2	1/2013	Heffernan
8,479,776	B2	7/2013	Berardi
8,789,565	B1	7/2014	Wicken
9,051,066	B1	6/2015	Malone
9,174,141	B2	11/2015	Warner
9,242,749	B2	1/2016	Malone
9,315,282	B2	4/2016	Malone
9,481,477	B2	11/2016	Kjar
9,524,105	B2	12/2016	Samuels
9,527,612	B2	12/2016	Malone
9,533,779	B2	1/2017	Malone
D793,483	S	8/2017	Khubani
D793,484	S	8/2017	Khubani
D793,485	S	8/2017	Khubani
9,776,744	B2	10/2017	Khubani
9,783,327	B2	10/2017	Khubani
9,844,737	B1	12/2017	Warner
2004/0233674	A1	11/2004	Vanderschuit
2005/0004430	A1	1/2005	Lee
2005/0132821	A1	6/2005	Furey
2005/0138862	A1	6/2005	O'Connor
2006/0272432	A1	12/2006	Belongia
2008/0029099	A1	2/2008	Storz
2008/0121309	A1	5/2008	Boise
2008/0166943	A1	7/2008	Hou
2008/0195226	A1	8/2008	Williams
2009/0050835	A1	2/2009	Boise
2009/0130948	A1	5/2009	James
2010/0014378	A1	1/2010	Strahmann
2010/0255226	A1	10/2010	Heffernan
2010/0319796	A1	12/2010	Whitaker
2010/0326212	A1	12/2010	Furey
2011/0030847	A1	2/2011	Wang
2011/0253256	A1	10/2011	Finley
2012/0085461	A1	4/2012	Coker
2012/0256012	A1	10/2012	Posner
2012/0326212	A1	12/2012	Fompeyrine
2013/0118640	A1	5/2013	Saggio
2013/0186972	A1	7/2013	Petrovic
2013/0226219	A1	8/2013	Brister
2013/0240082	A1	9/2013	Mueller
2014/0030452	A1	1/2014	Warner
2014/0073990	A1	3/2014	Holmes
2014/0360626	A1	12/2014	Stieler
2015/0259085	A1	9/2015	Malone
2016/0083122	A1	3/2016	Malone
2016/0101367	A1	4/2016	Walz
2016/0243454	A1	8/2016	Laden

FOREIGN PATENT DOCUMENTS

CN	204293867	4/2015
DE	29800591	3/1998
EP	0609386	9/1996
FR	2546069	11/1984
FR	2606393	11/1986
FR	2911512	7/2008
FR	2955036	7/2011
GB	2369307	5/2002
JP	S6182080	4/1986
JP	3153581	9/2009
JP	2010023857	2/2010
JP	2011162208	8/2011
WO	WO 87/02438	4/1987
WO	WO 90/00430	1/1990
WO	WO2013123067	8/2013
WO	WO 2014022248	2/2014
WO	WO 2015/027187	2/2015
WO	WO 2015/118518	8/2015

OTHER PUBLICATIONS

Petition for Post Grant Review of U.S. Pat. No. 9,315,282, filed on Aug. 12, 2016 (PGR2016-00031).
Declaration of Dr. Ken Kamrin dated Aug. 11, 2016 submitted in support of Petition for Post Grant Review of U.S. Pat. No. 9,315,282, filed on Aug. 12, 2016 (PGR2016-00031).

(56)

References Cited

OTHER PUBLICATIONS

Declaration of Dr. Ken Kamrin dated Aug. 7, 2016, submitted in support of Petition for Post Grant Review of U.S. Pat. No. 9,242,749, filed on Aug. 8, 2016 (PGR2016-00030).

Final Written Decision of PGR2015-00018, entered on Dec. 30, 2016.

Jun. 21, 2016 Extended European Search Report issued in connection with Application No. 15158482.8, issued by the European Patent Office.

Petition for Post Grant Review of U.S. Pat. No. 9,242,749, filed on Aug. 8, 2016 (PGR2016-00030).

Decision Instituting Post Grant Review of U.S. Pat. No. 9,315,282, entered on Feb. 21, 2017.

Decision Instituting Post Grant Review of U.S. Pat. No. 9,242,749, entered on Feb. 21, 2017.

Examination Report for Australian Patent Application No. 2016100289, dated Oct. 25, 2016.

Written Opinion of International Search Authority PCT/US2016/018922, published May 2, 2016.

International Search Report PCT/US2016/018922, published May 2, 2016.

Written Opinion of International Search Authority PCT/US2016/018912, published Apr. 22, 2016.

Jun. 29, 2016 Non-Final Office Action issued in connection with U.S. Appl. No. 14/978,839.

Jun. 9, 2016 Non-Final Office Action issued in connection with U.S. Appl. No. 14/997,230.

Jul. 21, 2016 Non-Final Office Action issued in connection with U.S. Appl. No. 15/177,796.

International Search Report PCT/US2016/018912, published Apr. 22, 2016.

Water Balloon Paint War, available at <http://www.growingajeweledrose.com/2013/07/water-balloon-paint-war.html>, accessed on Dec. 27, 2015.

Colorful Water Balloon Fights, available at <http://rundenched.com/introducing-the-most-colorful-water-balloon-fight-in-the-world/>, accessed on Dec. 27, 2015.

Making Paint Balloons, available at http://learn.walmart.com/Tips-Ideas/Articles/Summer_Gatherings/25392/, accessed on Dec. 27, 2015.

Examination Report for Australian Patent Application No. 2016100289, dated May 20, 2016.

Written Opinion of International Search Authority PCT/US17/13783, published Apr. 14, 2017.

Examination Report for Australian Patent Application No. 2016102136, dated Mar. 7, 2017.

Examination Report for Australian Patent Application No. 2016102137, dated Mar. 7, 2017.

Examination Report for Australian Patent Application No. 2016102138, dated Mar. 9, 2017.

International Search Report PCT/US17/13783, published Apr. 14, 2017.

U.S. Appl. No. 14/978,839, filed Dec. 22, 2015.

U.S. Appl. No. 14/997,230, filed Jan. 15, 2016.

U.S. Appl. No. 15/177,796, filed Jun. 9, 2016.

U.S. Appl. No. 15/123,434, filed Sep. 2, 2016.

U.S. Appl. No. 15/123,453, filed Sep. 8, 2016.

Decision Denying Institution of Post Grant Review of U.S. Pat. No. 9,533,779 entered on Nov. 30, 2017.

Decision Instituting Post Grant Review of U.S. Pat. No. 9,527,612 entered on Oct. 11, 2017.

Petition for Post Grant Review of U.S. Pat. No. 9,682,789, filed on Jul. 21, 2017 (PGR2017-00040).

Petition for Post Grant Review of U.S. Pat. No. 9,533,779, filed on Sep. 12, 2017 (PGR2017-00052).

Petition for Post Grant Review of U.S. Pat. No. 9,527,612 filed on Mar. 22, 2017 (PGR2017-00015).

Petition for Post Grant Review of U.S. Pat. No. 9,527,612, filed on Sep. 12, 2017 (PGR2017-00051).

Petition for Post Grant Review of U.S. Pat. No. 9,533,779, filed on May 23, 2017 (PGR2017-00024).

Petition for Post Grant Review of U.S. Pat. No. 9,051,066, filed on Jun. 22, 2015 (PGR2015-00018).

Decision Instituting Post Grant Review of U.S. Pat. No. 9,051,066, entered on Jan. 4, 2016 (PGR2015-00018).

Noodlehead Sprinkler, copyrighted 2010.

Zorbz Replicator, available at <https://www.youtube.com/watch?v=wCajj0KPV7c>, accessed on Aug. 19, 2014.

Declaration of Dr. Ken Kamrin dated Jun. 21, 2015, submitted in support of Petition for Post Grant Review of U.S. Pat. No. 9,051,066, filed on Jun. 22, 2015 (PGR2015-00018).

Declaration of Dr. Greg Saggio dated Jun. 18, 2015, submitted in support of Petition for Post Grant Review of U.S. Pat. No. 9,051,066, filed on Jun. 22, 2015 (PGR2015-00018).

Declaration of Kendall Harter dated Jun. 17, 2015, submitted in support of Petition for Post Grant Review of U.S. Pat. No. 9,051,066, filed on Jun. 22, 2015 (PGR2015-00018).

Bunch O Balloons, available at bunchoballoons.com, copyrighted 2015, accessed in Jun. 2015.

This Simple Contraption Lets You Make 100 Water Balloons Every Minute, Gizmodo, available at <http://gizmodo.com/>, published Jul. 2014.

Examination Report for Australian Patent Application No. 2016100290, dated May 20, 2016.

European Patent Office European Search Report of Application No. 16788004, dated Jan. 4, 2018.

European Patent Office European Search Report of Application No. 16788005, dated Jan. 4, 2018.

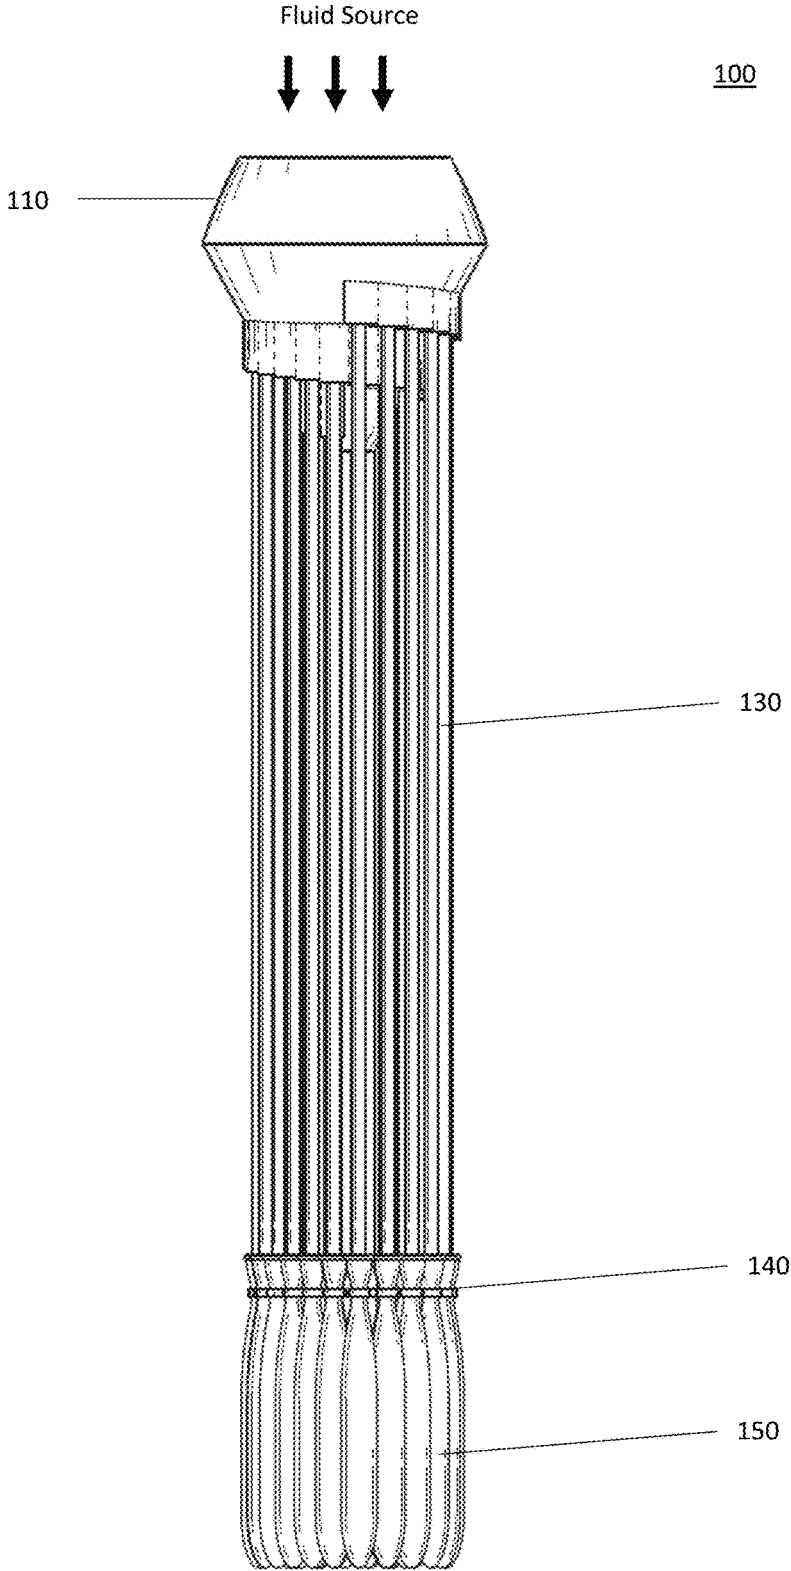


FIGURE 1A

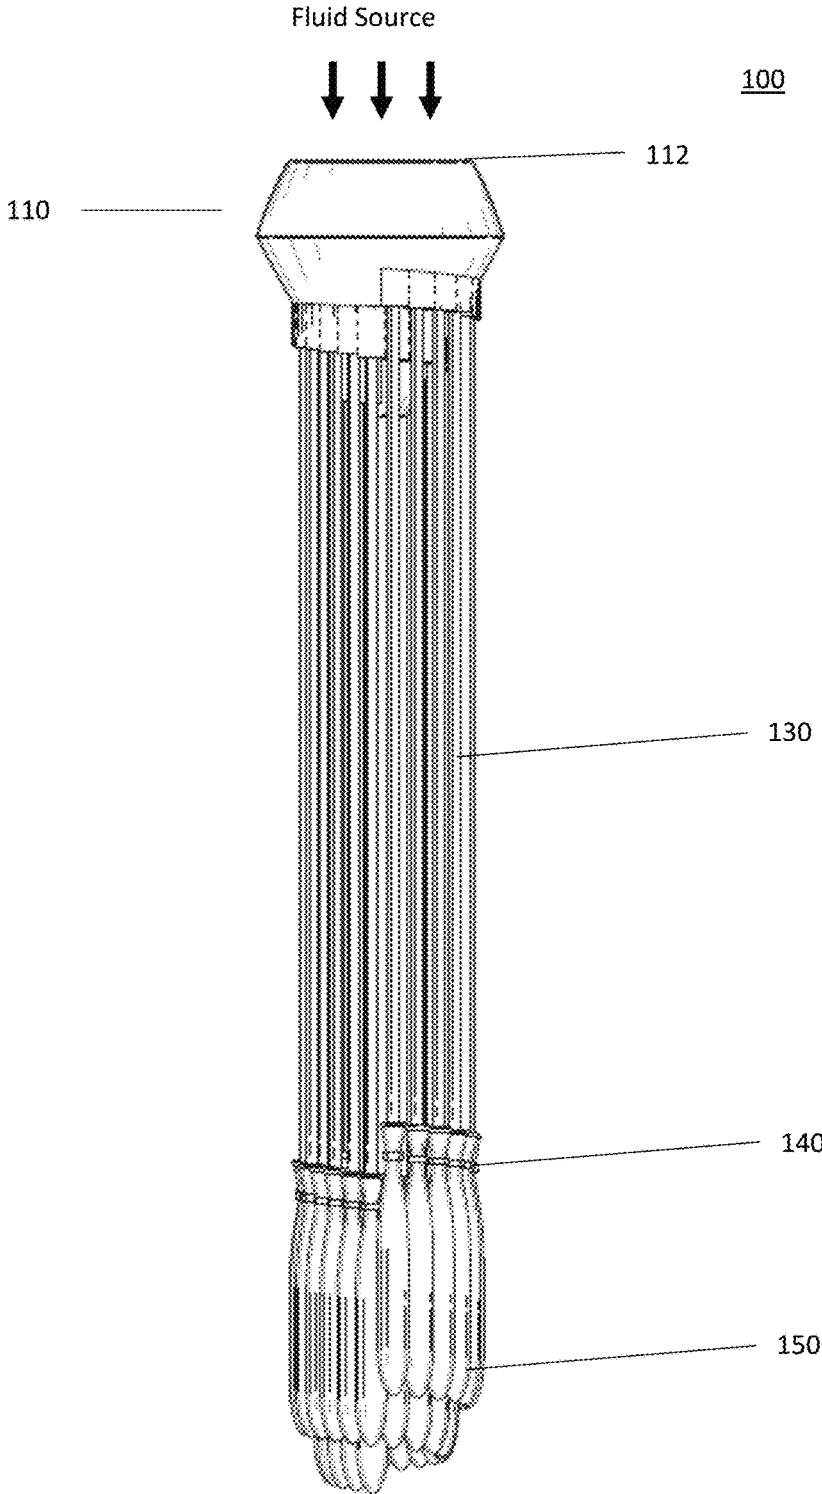


FIGURE 1B

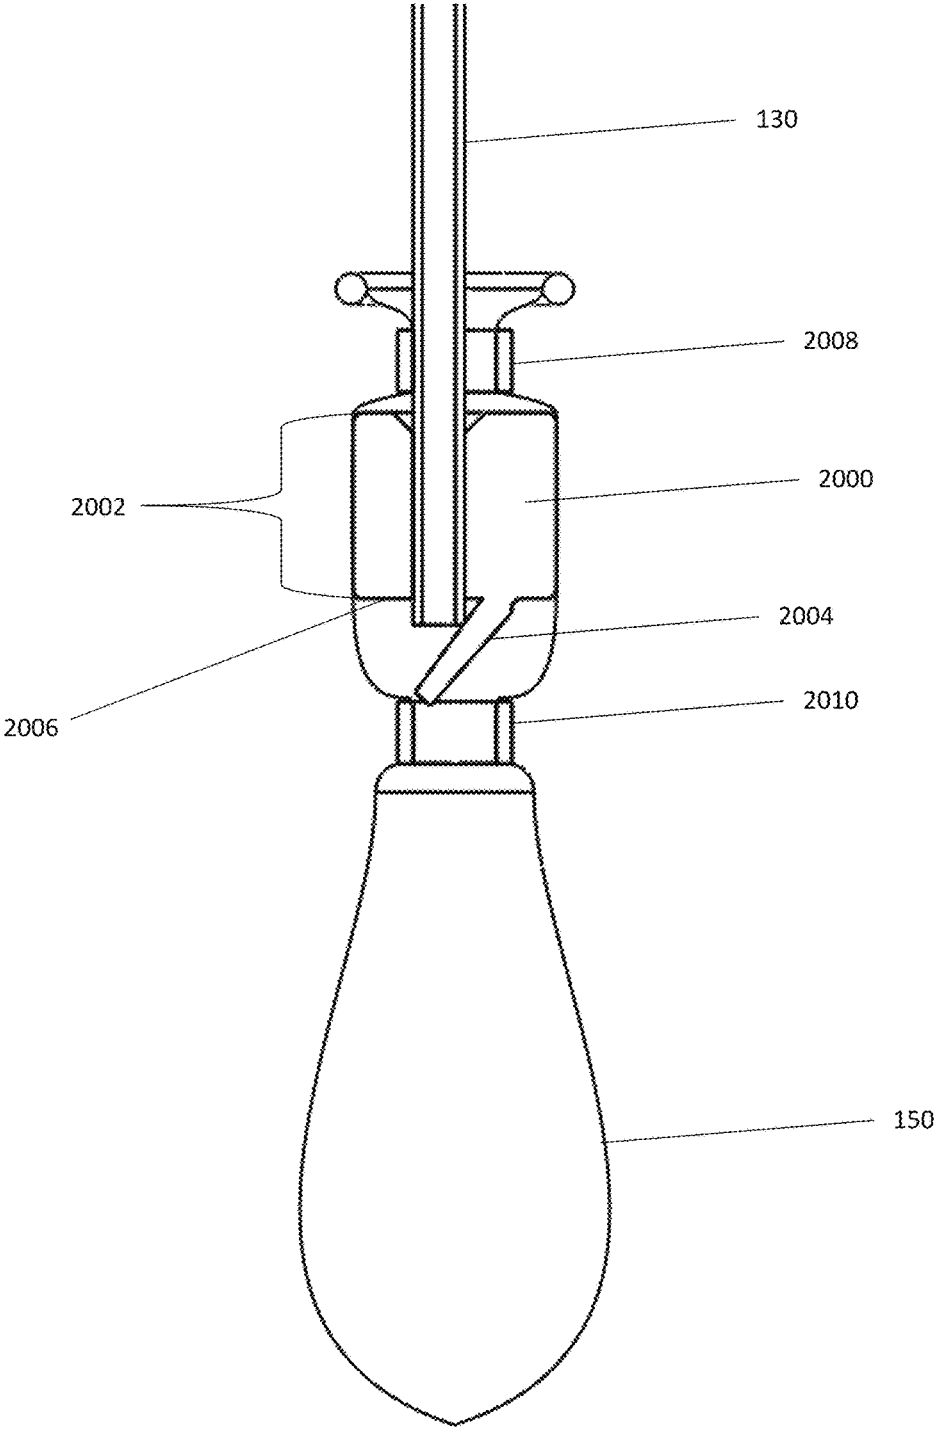


FIGURE 2A

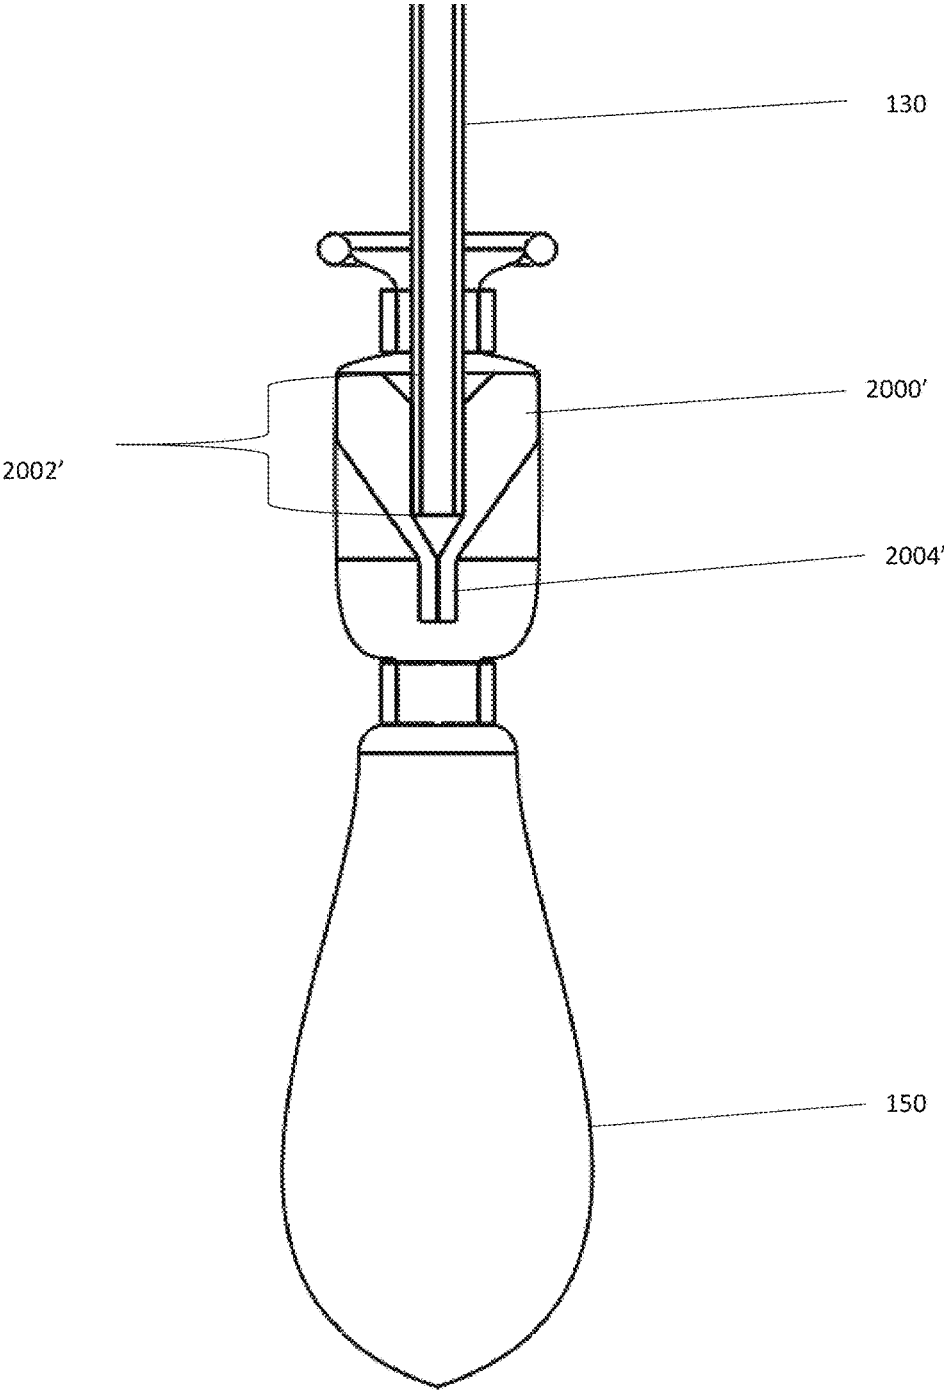


FIGURE 2B

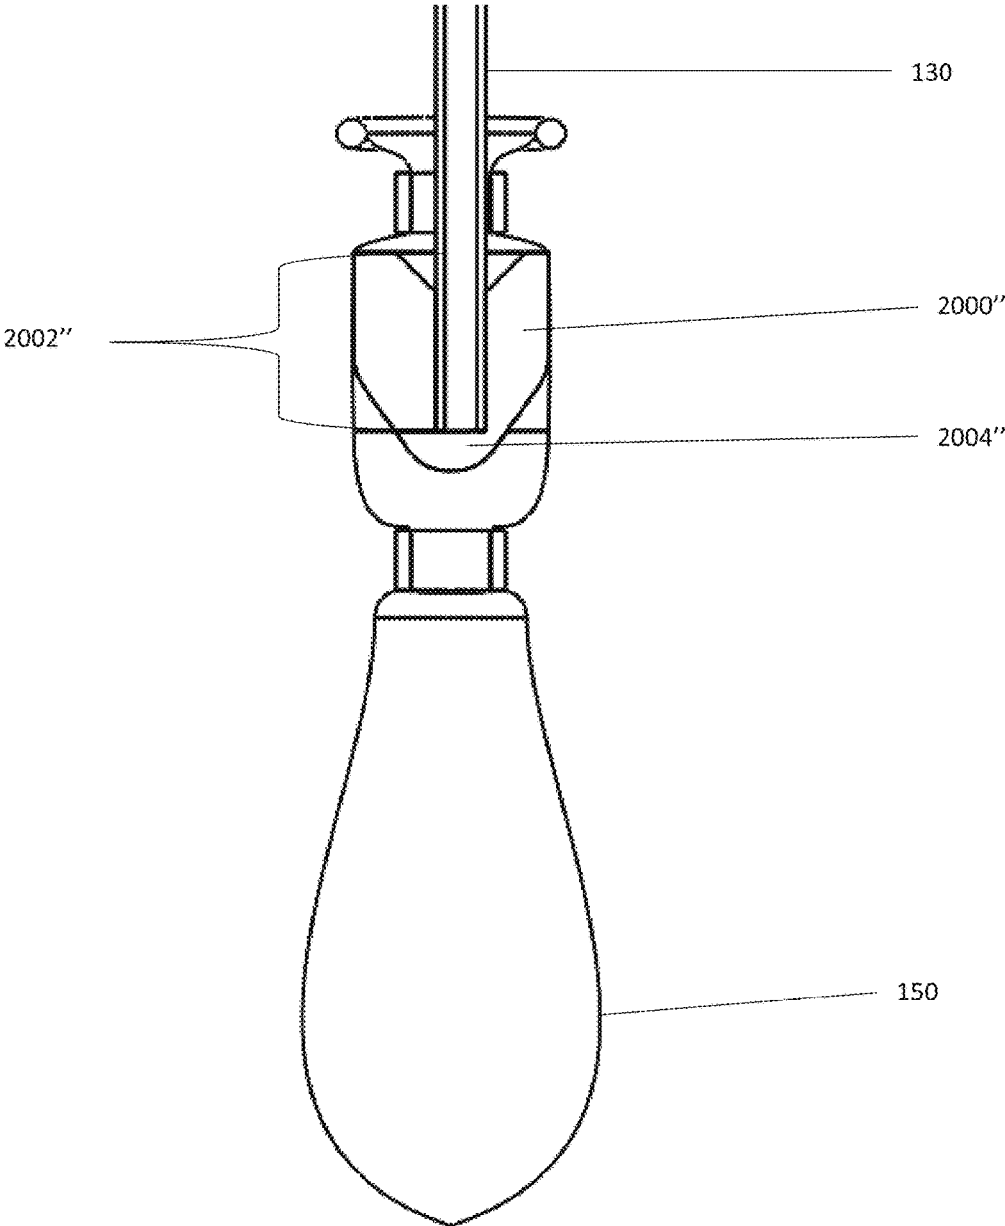


FIGURE 2C

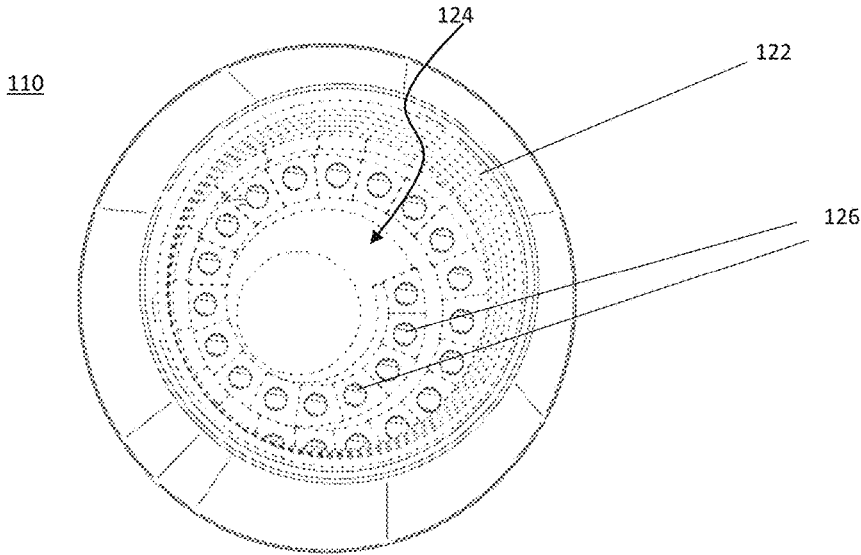


FIGURE 3A

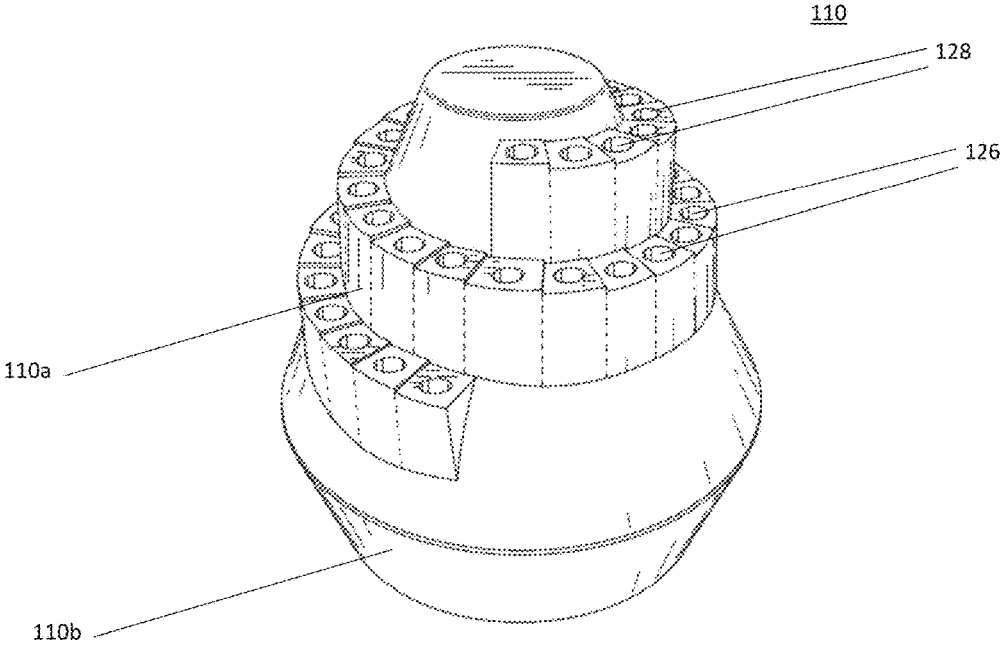


FIGURE 3B

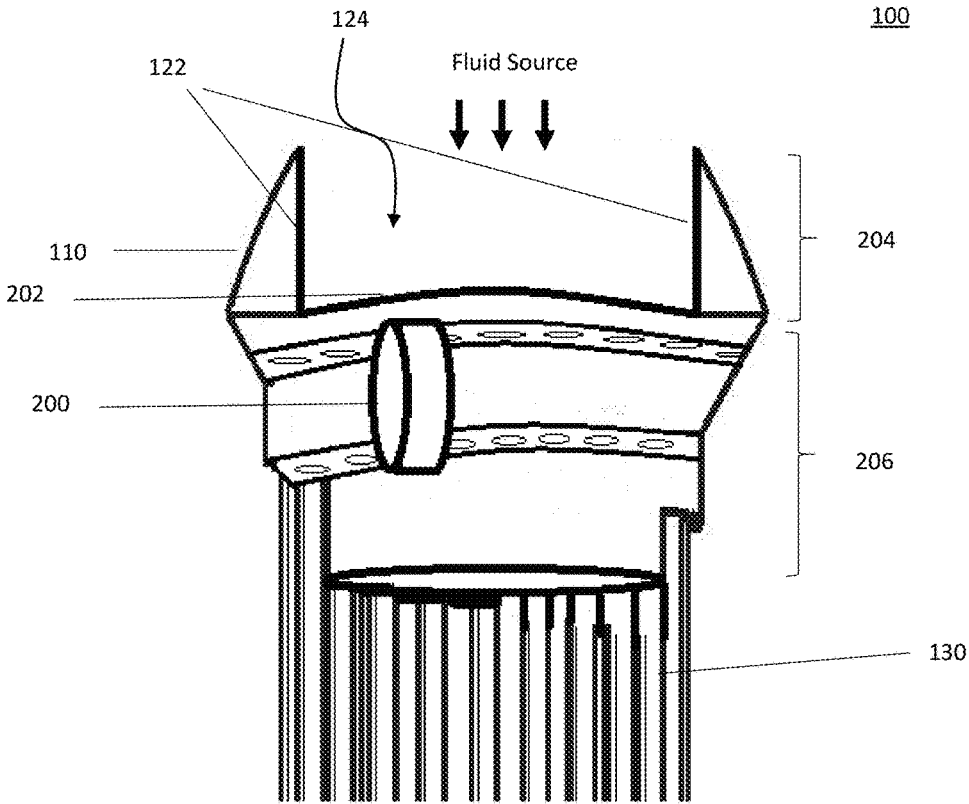


FIGURE 4A

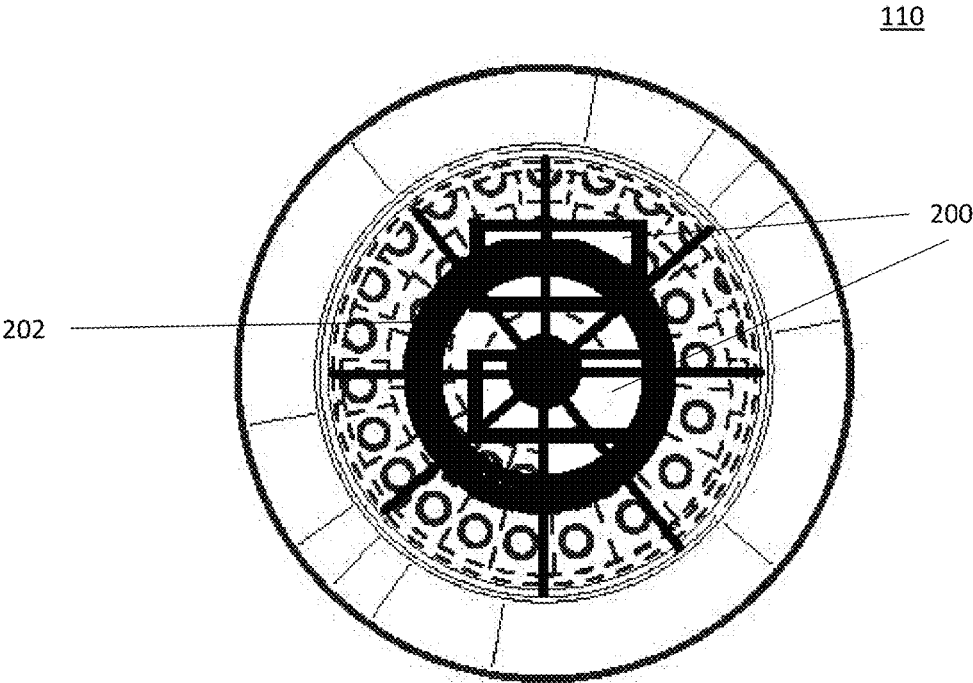


FIGURE 4B

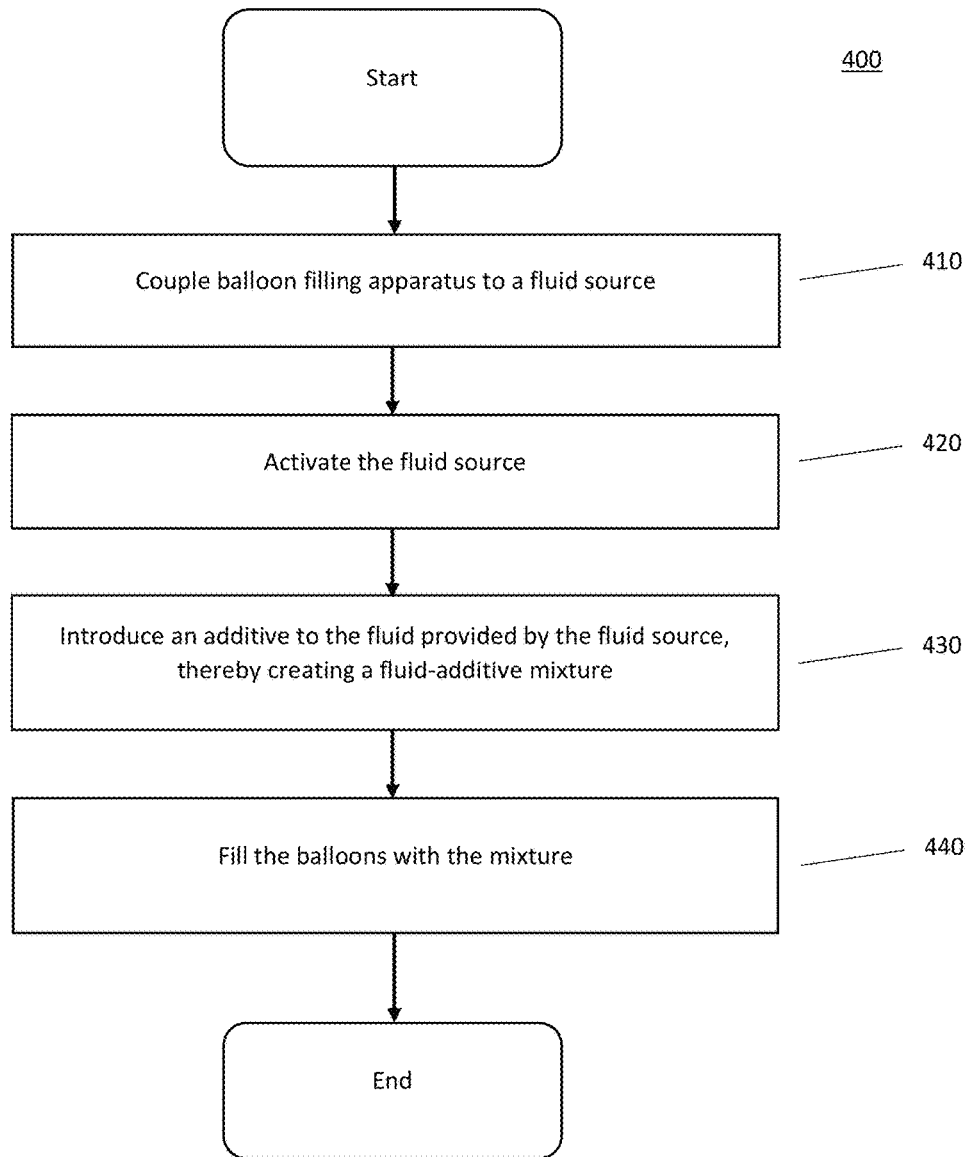


FIGURE 5

CONTAINER SEALING DEVICE

CROSS REFERENCE TO PRIOR APPLICATIONS

The present application is a continuation application of U.S. application Ser. No. 15/407,985, filed on Jan. 17, 2017, which is a continuation-in-part application of U.S. application Ser. No. 15/359,134, filed on Nov. 22, 2016, which is a continuation-in-part of U.S. application Ser. No. 15/123,434, filed on Sep. 2, 2016, which is a U.S. National Stage Application of International Application No. PCT/US16/18912, filed on Feb. 22, 2016, which claims the benefit of U.S. Provisional Application No. 62/182,122, filed on Jun. 19, 2015, U.S. Provisional Application No. 62/254,487, filed on Nov. 12, 2015, and U.S. application Ser. No. 14/997,230, filed on Jan. 15, 2016. U.S. application Ser. No. 15/359,134, filed on Nov. 22, 2016, is also a continuation-in-part of U.S. application Ser. No. 15/123,453, filed on Sep. 2, 2016, which is a U.S. National Stage Application of International Application No. PCT/US16/18922, filed on Feb. 22, 2016, which claims the benefit of U.S. Provisional Application No. 62/182,122, filed on Jun. 19, 2015, and U.S. application Ser. No. 14/978,839, filed on Dec. 22, 2015. These applications are incorporated by reference herein in their entireties.

FIELD

The present application generally relates to devices, apparatus, systems and methods for filling containers with a fluid. Specifically, the present application relates to automatically filling multiple balloons with a fluid mixture.

BACKGROUND

Some containers, particularly fluid-inflatable containers such as balloons, can be difficult to fill with a fluid, especially when there is a need to fill multiple containers simultaneously and/or quickly. To make the filling of these containers easier and more efficient, various products are currently available that facilitate the filling of fluid-inflatable containers. These fluid-inflatable containers may be filled or inflated using various fluids, such as, e.g., liquids such as water, gases such as helium, or medications. Examples of fluid-inflatable containers include those used for recreational purposes, such as balloons.

Additionally, there may be times where it may be desirable to be able to introduce an additive, such as a dye or other soluble or insoluble material, to the fluid used to fill the fluid-inflatable containers. Nevertheless, it may be difficult, impossible, inefficient, or undesirable to first mix the fluid with the additive and subsequently fill the containers with the mixture. Further, many of the existing products may connect directly to a fluid source, such as a hose or faucet, thereby making it impracticable to pour a mixture to fill fluid-inflatable containers using such products.

SUMMARY

Embodiments of the present invention can provide an apparatus for filling a plurality of containers with a fluid. The apparatus can include a connector configured to removably couple the apparatus to a fluid source, a flow path providing fluid communication between the fluid source and a plurality of containers coupled to the apparatus, a sealing element disposed within each of the plurality of containers, the sealing element configured to couple the container to the

apparatus and automatically seal the container when the container is decoupled from the apparatus, a retaining member including a sleeve affixed to each of the plurality of containers, to position the sealing element in a neck of each of the plurality of containers, the sleeve being configured to prevent radial expansion of the containers, and a mixing mechanism disposed in the flow path and configured to receive an additive and introduce the additive in to the flow path.

According to some embodiments, the plurality of containers can include balloons and the apparatus can be reusable. According to certain exemplary embodiments, the plurality of fluid conduits are substantially the same length.

According to some embodiments, the additive may be a pellet, a powder, or a gel.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1A is an illustration of an exemplary fluid filling apparatus according to embodiments of the present invention;

FIG. 1B is an illustration of an exemplary fluid filling apparatus according to embodiments of the present invention;

FIGS. 2A-2C are illustrations of exemplary sealing elements according to embodiments of the present invention;

FIGS. 3A and 3B are a perspective views of an exemplary connector according to embodiments of the present invention;

FIG. 4A is a cross-sectional view of an exemplary fluid filling apparatus according to embodiments of the present invention; and

FIG. 4B is a top view of an exemplary fluid filling apparatus according to embodiments of the present invention.

FIG. 5 is a flow diagram of an exemplary method according to embodiments of the present invention.

DETAILED DESCRIPTION

Embodiments of the present invention are generally directed to devices, apparatus, systems, and methods for filling containers with a fluid. Specifically, embodiments of the present invention provide an apparatus for filling multiple balloons at substantially the same time. Certain embodiments of the present invention facilitate introducing an additive to a fluid source to enable automatic filling of multiple containers in a substantially simultaneously manner with a fluid mixture. Although the embodiments of the present invention are primarily described with respect to dyes and fluid-inflatable containers, it is not limited thereto, and it should be noted that the apparatus and systems described herein may be used to fill any type of containers with any type of fluid and/or fluid mixture.

In accordance with embodiments of the present invention, FIG. 1A shows an exemplary fluid filling apparatus **100**. As shown in FIG. 1A, fluid filling apparatus **100** may include connector **110**, conduits **130**, containers **150**, and sealing elements **140**. In use, fluid filling apparatus **100** is coupled to a fluid source, and when the fluid source is activated, the fluid passes through connector **110**, conduits **130** and into containers **150**, thereby filling containers **150** with the fluid at substantially the same time. Optionally, connector **110** may include an additive which may mix with the fluid as the fluid is passing through connector **110** so that containers **150** are filled with a mixture of the fluid and the additive. The

3

fluid used to fill containers **150** may include any type of fluid, such as, water and other liquids, as well as helium and other gases.

FIG. 1B shows another embodiment of the present invention. As shown in FIG. 1B, certain embodiments of the present invention provide a fluid filling apparatus **100** having conduits **130** which are arranged such that the distal end of conduits **130** (e.g., the end of conduit **130** furthest from connector **110**) are disposed at different distances from a first end **112** of connector **110**. Accordingly, each distal end may be disposed at a respective distance from first end **112** of connector **110** and all the respective distances may be different. For example, as shown in FIG. 1B, conduits **130** and containers **150** may be arranged in a cascading spiraling arrangement, where the distal end of each conduit **130** is disposed at a different distance from first end **112** of connector **110**. Although a cascading spiraling arrangement is shown in FIG. 1B, conduits **130** may take be arranged in any arrangement. For example, conduits **130** and containers **150** may be arranged in any arrangement or pattern in which the distal end of each conduit **130** is disposed at a different distance from first end **112** of connector **110**. Alternatively, conduits **130** may be arranged in a sequential arrangement such as, e.g., a zig-zag pattern, a linear pattern, an arcing pattern, a shaped pattern (e.g., a star shape, a moon shape, a rectangle, a square, a circle, a triangle, etc.). According to one embodiment, when conduits **130** are arranged in a sequential arrangement, the distance from the distal end of a given conduit **130** to first end **112** of connector **110** may be greater than the distance from the distal end of the preceding conduit to first end **112** of connector **110**. Additionally, although the distal end of conduits **130** are disposed at different distances from a first end **112** of connector **110**, conduits **130** may all be substantially the same length. This may be achieved, for example, by coupling conduits **130** at different distances from first end **112** within connector **110**.

According to embodiments of the present invention, sealing elements **140** may be self-sealing. For example, sealing elements **140** may automatically seal containers **150** when containers **150** are decoupled from fluid filling apparatus **100**. This may be accomplished when the force that each sealing element **140** exerts in coupling each respective container **150** to fluid filling apparatus **100** is overcome. This may be accomplished, for example, by the weight and/or pressure each container **150** exceeding a certain threshold thereby causing the container to become detached from the conduits **130**, manual removal of the containers **150**, or some other action, such as shaking fluid filling apparatus **100**, to remove containers **150** from fluid filling apparatus **100**. As this force is overcome, the respective container is detached from fluid filling apparatus **100**, and sealing elements **140** automatically seal the end of respective container **150** that was attached to fluid filling apparatus **100**. According to certain exemplary embodiments of the present invention, containers **150** may include balloons.

According to certain exemplary embodiments of the present invention, sealing elements **140** may include a mechanism by which the containers are automatically sealed when they are detached from fluid filling apparatus **100**. For example, sealing elements **140** can include rubber bands or clamps, which simply clamp and/or seal the containers by exerting a compressive force around a neck of containers **150**. Alternatively, sealing elements **140** can include other mechanisms to seal containers **150**. For example, sealing elements **140** can include a liquid-activated material positioned in the neck of containers **150** that are configured to expand and seal the neck of containers **150** when a fluid such

4

as water is introduced to containers **150**. Alternatively, sealing elements **140** can include a self-healing membrane positioned in the neck of containers **150**, such as a closed-cell foam, that allow conduits **130** to be inserted therethrough, and self-heals when conduit **130** is removed so as to seal container **150**. According to certain exemplary embodiments of the present invention, sealing elements **140** can also include a valve as shown in FIGS. 2A-2C.

As shown in FIG. 2A, sealing element **140** can include a valve **2000** positioned in the neck of container **150**. Valve **2000** can include a channel **2002** and a sealing member **2004**, such as a flap. As shown in FIG. 2A, conduit **130** can be received through channel **2002** to allow fluid to fill container **150**. According to certain exemplary embodiments, conduit **130** can be positioned in channel **2002** such that a portion of conduit **130** extends beyond a lower surface **2006** so that it maintains sealing member **2004** in an open position while conduit **130** is received in channel **2002**. Alternatively, conduit **130** can be positioned so that it does not extend beyond lower surface **2006**, and sealing member **2004** is opened by the flow pressure of the fluid filling containers **150** as containers **150** are being filled. Channel **2002** can be sized, shaped, dimensioned, and configured to receive conduit **130** and apply a desired frictional force to ensure that container **150** is coupled to conduit **130** and automatically detaches container **150** from conduit **130** when the weight and/or pressure of container **150** exceeds a certain threshold. For example, the shape, length, dimensions of channel **2002** can be selected to obtain the desired frictional force. For example, the length of the channel (e.g., the longer the channel the greater the frictional force on conduit **130**), the diameter of the channel (e.g., a smaller diameter channel would have a greater frictional force), the shape of the channel (e.g., cylindrical, rectangular, triangular, oval-shaped, tapered, having ribs, etc.) can all be adjusted to achieve the desired frictional force. In operation, fluid is introduced to container **150** via conduit **130**, and once container **150** reaches the threshold at which it detaches from conduit **130**, the pressure within container **150** causes sealing member **2004** to close against lower surface **2006** of valve **2000**, thereby sealing container **150**. According to certain exemplary embodiments, valve **2000** is made of silicone. Alternatively, valve **2000** can be made of other suitable thermoplastics, rubbers, non-thermoplastic rubbers, etc.

As shown in FIG. 2A, valve **2000** can include ring members **2008** and **2010**. Preferably, ring members **2008** and **2010** are substantially rigid, and prevent container **150** from radially expanding at the positions where ring members **2008** and **2010** are positioned. This allows valve **2000** to remain positioned in the neck of container **150** so that it cannot be displaced out of container **150** through the opening or into the main body of container **150** as it expands and is filled with fluid. Alternatively, ring member **2008** and **2010** can be replaced with other mechanisms, components or features that substantially prevent radial expansion of the container, so as to allow valve **2000** to remain positioned in the neck of container **150**, such as, for example, a sleeve, an adhesive, etc.

Although valve **2000** shown in FIG. 2A is a reed type valve mechanism, other valves can be employed. For example, as shown in FIG. 2B, sealing element can include a duckbill valve **2000'** or a bullet valve **2000''** as shown in FIG. 2C. Each of duckbill valve **2000'** and bullet valve **2000''** operates similarly to valve **2000**. Each of duckbill valve **2000'** and bullet valve **2000''** is configured to be positioned in a neck of container **150** and includes a channel

(2002' and 2002", respectively) configured to receive conduit 130 therethrough. Each of duckbill valve 2000' and bullet valve 2000" also includes a sealing members (2004' and 2004") that seals container 150. For example, sealing members 2004' of duckbill valve 2002' can be pressed together to form a seal. Alternatively, another embodiment can provide a valve member including a slit through which conduit 130 is received and the slides/walls of the slit can form a seal when conduit 130 is removed. Although embodiments of the present invention have been described with respect to a reed valve, a bullet valve, and a duckbill valve, other valve mechanisms can be employed where the pressure within container 150 is used to close and seal the valve.

According to certain embodiments of the present invention, sealing elements 140 including valve 2000 can facilitate fluid filling apparatus 100 to be reusable. For example, containers 150, including sealing elements 140 having valve 2000 already inserted in the neck of containers 150, can be provided separate and apart from fluid filling apparatus 100, which can be installed onto fluid filling apparatus 100 by a user. For example, fluid filling apparatus 100 can be provided preassembled with a certain number of containers 150. After a user has used all containers 150 that were initial coupled to fluid filling apparatus 100, replacement containers 150, including sealing elements 140 including valve 2000 already inserted in the neck of containers 150, can be provided, and a user can install containers 150 onto conduits 130 of fluid filling apparatus 100. Accordingly, a user or consumer would not need to purchase the entire fluid filling apparatus 100 again.

FIGS. 3A and 3B show an exemplary connector 110 according to embodiments of the present invention. As shown in FIGS. 3A and 3B, connector 110 may be substantially cylindrical and may include a first portion 110a and a second portion 110b. According to certain embodiments, first portion 110a and second portion 110b may be two distinct components that can be removably or permanently coupled together. Alternatively, according to other embodiments, first portion 110a and second portion 110b may be formed from a single piece. As shown in FIGS. 3A and 3B, connector 110 includes coupling element 122, flow path 124, and openings/channels 126. Openings/channels 126 may include an interior end and an exterior end and provides fluid communication between the exterior of connector 110 and the interior of connector 110. Further, openings/channels 126 may be dimensioned and sized to receive, or otherwise connect with, conduits 130. Coupling element 122 is configured to removably couple connector 110, and thereby couple fluid filling apparatus 100, to an upstream component, such as a fluid source. Coupling element 122 may include threads, as shown in FIG. 3A, or any other type of clamping or coupling mechanism. Although connector 110 is shown to be substantially cylindrical, connector 110 may take on any shape (e.g., square, rectangular, etc.) that may be desired. Additionally, the shape of connector 110 may differ depending on the type of upstream component that is to be used with connector 110. Further, according to certain exemplary embodiments, second portion 110b may be an adapter that enables connector 110 to be coupled to different upstream components. For example, second portion 110b may include various different types of coupling element 122 and may removably couple to first portion 110a so that connector 110 can be coupled to a variety of upstream components. Further, connector 110 may include features on the exterior to assist a user in actuating coupling element 122 to couple end cap 120 to an upstream component. According to an embodiment of the present invention, coupling element

122 may include standardized threads for receiving the threads of a standard faucet or hose.

As shown in FIG. 3A, flow path 124 and openings/channels 126 may define a flow path that the fluid may follow from the upstream component, such as a fluid source, through connector 110 to conduits 130. Preferably, conduits 130 are received in or otherwise connected to openings/channels 126. Accordingly, fluid entering connector 110 may flow through flow path 124 and through openings/channels 126 to conduits 130. The number and dimensions of the openings/channels 126 correspond to the number and dimensions of conduits 130. According to certain embodiments of the present invention, the number, size, and dimensions of openings/channels 126 may be selected in view of the number of containers 150 to be filled at one time and the speed at which they are to be filled. Accordingly, connector 110 may include any number of openings/channels 126 that is desired. As shown in FIGS. 3A and 3B, according to an embodiment of the present invention, connector 110 may include forty openings/channels 126.

As shown in FIGS. 3A and 3B, openings/channels 126 may be configured in a spiraling helical arrangement. As shown in FIG. 3B, according to an embodiment of the present invention, the exterior of connector 110 may include a plurality of faceted surfaces 128 in a spiraling helical arrangement. The configuration of faceted surfaces 128 may correspond to the position of openings/channels 126 so that the exterior end of openings/channels 126 may be disposed on faceted surfaces 128. Although FIG. 3B is shown as each faceted surface 128 have a single opening/channel 126 disposed therein, alternatively, each faceted surface 128 can have any number of openings/channels 126 disposed therein, and each faceted surface 128 could have a different number of openings/channels 126 disposed therein. For example, each faceted surface 128 could have two openings/channels 126 disposed therein, alternatively, a first stepped surface 128 could have a single opening/channel 126 disposed therein and a second stepped surface could have three openings/channels 126 disposed therein. According to other embodiments, faceted surfaces 128 can be arranged in any configuration or arrangement. Alternatively, connector 110 may not include faceted surfaces 128 and openings/channels 126 may, for example, be disposed in a smooth spiraling helix or in a spiral on a flat exterior surface.

As shown in FIG. 3A, the interior end of openings/channels 126 may also be disposed in a plurality of faceted surfaces disposed in a spiraling helical arrangement in the interior of connector 110 corresponding to the plurality of faceted surfaces 128 disposed on the exterior of connector 110. Alternatively, the interior end of openings/channels 126 may be disposed on a flat surface within the interior of connector 110.

FIG. 4A shows a cross sectional view of fluid filling apparatus 100 according to embodiments of the present invention. As shown in FIG. 4A, connector 110 may be substantially cylindrical, and may define a flow path 124. Further, connector 110 preferably includes coupling element 122. Coupling element 122 may include any type of coupling mechanism, such as, e.g., threads or clamps. Coupling element 122 may be configured to couple connector 110 to an upstream component such as a fluid source. According to an embodiment of the present invention, coupling element 122 may include standardized threads for receiving the threads of a standard faucet or hose. Alternatively, coupling elements 122 may include various other types of coupling mechanisms. In operation, connector 110 is preferably coupled to a fluid source via coupling element 122. Once the

fluid source is activated, the fluid travels into connector **110**, through flow path **124** and into each of the openings/channels **126**. The fluid then passes through openings/channels **126** to conduits **130**, which are coupled to openings/channels **126**. The fluid then passes through conduits **130** to fill containers **150**.

As shown in FIG. 4A, connector **110** can include an additive **200** and an additive mixing mechanism. For example, additive mixing mechanism may include a separator **202** which secures additive **200** within the interior of connector **110** and defines two chambers **204** and **206**, which are in fluid communication with each other, within the interior of connector **110**. Separator **202** secures additive **200** within chamber **206** of the interior of connector **110** during operation of the fluid filling apparatus **100**. For example, when the fluid source is activated, the fluid comes into contact with additive **200** in chamber **204** and mixes with additive **200** in chamber **206** and/or chamber **204**. The mixture of the additive and the fluid passes through openings/channels **126** to conduits **130**, which are coupled to openings/channels **126**. The fluid and additive mixture then passes through conduits **130** to fill containers **150**. Although additive **200** is shown in pellet form in FIG. 4A, additive **200** may take any form. For example, additive **200** may be in the form of, e.g., a pellet, a powder, or a gel, and may be any material or substance for which a fluid mixture is desired. According to certain exemplary embodiments, additive **200** may include any substance, such as, e.g., soda ash, bicarbonate, lactose, citric acid, mineral oil, or a dye. Additionally, although only one additive **200** is shown in FIG. 4A, any number of additives may be disposed within chamber **206** of connector **110**.

FIG. 4B shows a top-view of connector **110** with the mixing mechanism. As shown in FIG. 4B, connector **110** includes separator **202** and additives **200**. Preferably, separator **202** substantially secures additives **200** to the interior of connector **110** so that additives remain within chamber **206** of connector **110** while fluid filling apparatus **100** is in use. Preferably, separator **202** substantially secures additives **200** within chamber **206** of connector **110** even as additives **200** experience turbulence introduced by the fluid flowing through chamber **206**. Accordingly, additives **200** substantially remain within chamber **206** while ensuring that chambers **204** and **206** remain in fluid communication with each other. It is contemplated that separator **202** may not secure additive **200** in chamber **206** permanently. For example, as the mixture is being created and additive **200** becomes smaller, portions of additive **200** may become sufficiently small that portions of additive **200** may pass through the portions of separator **202** that provide the fluid communication between chambers **204** and **206** into chamber **204**. Although separator **202** is shown in FIG. 4B to have a star configuration with an annular ring and a circular center, separator **202** may include any mechanism that can secure additives **200** within chamber **206** while maintaining fluid communication between chambers **204** and **206**. For example, separator **202** can include a mesh, a component with holes or openings in any configuration, etc.

In use, connector **110** may be coupled to a fluid source via coupling element **122**. When the fluid source is activated, the fluid flows through flow path **124** of connector **110**. The fluid then chamber **206** of connector **110** and interacts with additive **200**. As the fluid mixes with additive **200**, the mixture exits chamber **206** and enters chamber **206** through openings/channels **126**. From there, the mixture flows through openings/channels **126** to conduits **130**. The mixture then passes through conduits **130** to containers **150**,

thereby automatically filling containers **150** with a mixture of the fluid and additive **200** in a substantially simultaneous manner.

FIG. 5 shows an exemplary method **400** in accordance with embodiments of the present invention. According to certain embodiments, method **400** may be performed, for example, using fluid filling apparatus **100**. As shown in FIG. 5, in step **410**, a balloon filling apparatus can be coupled to a fluid source. If method **400** is being performed using fluid filling apparatus **100**, this can include coupling connector **110** via coupling elements **122** to a fluid source. In step **420**, the fluid source can be activated. In step **430**, an additive can be introduced to the fluid provided by the fluid source, thereby creating a fluid-additive mixture. If method **400** is being performed using fluid filling apparatus **100**, this can include introducing an additive using a mixing mechanism, such as those described herein. For example, the fluid can come into contact with additive **200** in chamber **204** and mix with additive **200** in chamber **206** and/or chamber **204**, thereby creating the fluid-additive mixture. In step **440**, the balloons can be filled with the fluid-additive mixture. With respect to fluid filling apparatus **100**, after the mixture of the fluid-additive is created, it can pass through openings/channels **126** to conduits **130**, which are coupled to openings/channels **126**, and then pass through conduits **130** to fill containers **150**.

The embodiments and examples shown above are illustrative, and many variations can be introduced to them without departing from the spirit of the disclosure or from the scope of the appended claims. For example, elements and/or features of different illustrative and exemplary embodiments herein may be combined with each other and/or substituted with each other within the scope of the disclosure. For a better understanding of the disclosure, reference should be had to the accompanying drawings and descriptive matter in which there is illustrated exemplary embodiments of the present invention.

What is claimed:

1. An apparatus for filling a plurality of containers with a fluid, the apparatus comprising:
 - a connector configured to removably couple the apparatus to a fluid source;
 - a flow path providing fluid communication between the fluid source and a plurality of containers coupled to the apparatus;
 - a sealing element disposed within each of the plurality of containers, the sealing element configured to couple the container to the apparatus and automatically seal the container when the container is decoupled from the apparatus;
 - a retaining member including a sleeve affixed to each of the plurality of containers, to position the sealing element in a neck of each of the plurality of containers, the sleeve being configured to prevent radial expansion of the containers; and,
 - a mixing mechanism disposed in the flow path and configured to receive an additive and introduce the additive in to the flow path.
2. The apparatus of claim 1, wherein the plurality of containers includes balloons.
3. The apparatus of claim 1, wherein the apparatus is reusable.
4. The apparatus of claim 1, wherein the plurality of fluid conduits are substantially the same length.

5. The apparatus of claim 1, wherein the additive is a pellet, a powder, or a gel.

* * * * *